ZOMLION **ARTICULATING BOOM LIFT ZA32J**

Comply with CE Standard

HIGHLIGHTS

▶ Provide heavy lifting of 250kg /550lb load for 28% higher efficiency

▶ Build-in multiple pressure control leveling system to enhance stability

 Precise load sensing system to improve overload safety operations

> Compact transportation size makes it available for container

> > Outstanding below ground reach of 16ft 9in

ZOOMLION

Model	ZA32J		
	Imperial	Metric	
	Size		
Work Height	111ft 8in	34.04m	
Platform Height	105ft 6in	32.04m	
Horizontal Outreach	69ft 5in	21.15m	
Up and Over Height	47ft 6in	14.47m	
A-Stowed Length	41ft 10in	12.75m	
B-Stowed Width	8ft 2in	2.49m	
C-Stowed Height	9ft 6in	2.89m	
D-Platform Length	8ft	2.44m	
E-Platform Width	2ft 12in	0.91m	
F-Wheelbase	12ft 6in	3.81m	
G-Ground Clearance	1ft 5in	0.42m	
	Performance		
Platform Capacity	550 lb	250kg	
Drive Speed	3.23 mph	5.2km/h	
Gradeability	45%	45%	
Turning Radius (Inside)	15ft 9in/6ft 10in	4.79m/2.09m	
Turning Radius (Outside)	26ft 8in/18ft 10in	8.13m/5.6m	
Swing	360° continuous		
Platform Rotation	±	±90°	
H-Tail Swing	7in	0.19m	
Max. Working Slope	5°		
Max. Wind Speed	28mph	12.5m/s	
	Power		
Diesel Engine	Kubota V2607 (Eu Stage V) Kubota V3307 (China Stage III) Weichai DHN2.3 (China Stage IV)		
Fuel Tank Capacity	36.9 (us gal)	150L	
Auxiliary Power	12	2V	
Control Voltage	12	12V	
Hydraulic System Capacity	79.25 (us gal)	300L	
Hydraulic Tank Capacity	52.8 (us gal)	200L	
	Tire		
Туре	IN445/50D710 F	IN445/50D710 Foam-filled Tires	
	Weight		
Gross	43651 lb	19800kg	

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification. Product specifications are updated to June, 2024.

FEATURES

Standard Features

Horn
All motion alarm
Proportional control
Self-closing entry gate
Flashing beacon
Auto-leveling system
Emergency stop button
Over tilt protection system
Emergency descent system
On-board diagnostic system
4.3' LED display
Load sensing system
Swing-out engine tray


Accessories & Options


- Platform work lights
- Anti-collision device
- AC power to platform



Phone: 0086(731)-88353692 E-mail: awp@zoomlion.com

Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China Web: www.zoomlion-access.com



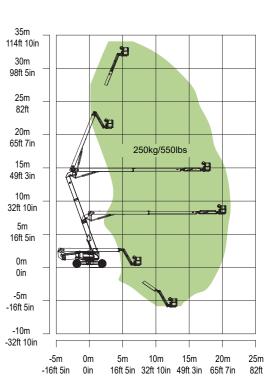

Range of Motion ZA32J

